

# キヤスト CASTLE


PREMIUM  
**WATERPROOFING**

## PME-105 (Primer)

- ✓ Clogs Micropores of **CONCRETE SURFACES**
- ✓ Strong Cementing Power to concrete.
- ✓ High Solid Content. Saves you time.
- ✓ Non-Toxic & Non-Flammable.



### EASY STEP APPLICATION



1. Clean and dry surface completely before applying.



2. Can be applied using either brush or roller.




3. As Primer
  - apply 1 coat of PME 105 (Primer) directly from the container.
  - no need to add water.

As Cement and Mortar Intensifier:  
- Use the following ratio

(PME-105 4KG.) (PME-105 1KG.)

Cement	4 KG.	1KG.
Standard Sand	12 KG.	3KG.
PME 105	4 KG.	1KG.




4. Let it dry for 60 minutes before applying PME-101 (Top Coat).

### SUITABLE FOR


- ALL CONCRETE SURFACE.

### COVERAGE

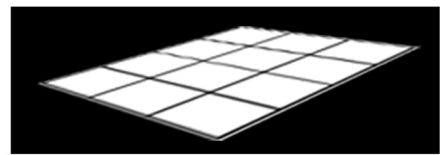

1Gal covers 16 to 20 SQM

1Lit covers 4 to 6 SQM

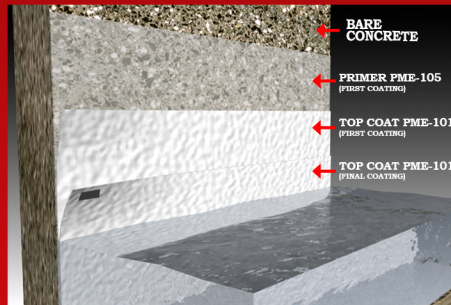

**POT LIFE** 36 months after opening; Store air tight lid in original container. Add ample amount of water if compound becomes thick.

**SHELF LIFE** Indefinite, in sealed original container.