



# Intumescent Seals

## Fire and Smoke

RP1004

H



A rigid PVC cased Intumescent fire seal for use in fire resisting doors and door frames. RP1004 is set into a morticed groove. An aggressive self adhesive backing tapes is standard.

**Seal Size** 2100mm.

**Fixing Method** Self adhesive.



**Note:** Contact surface must be clean, smooth and if painted, well cured.

**Seal Material** Intumescent infill, with Rigid PVC holder.

**Standard Finish** Brown or White.

### Approvals

**Fire & Smoke** Conforms to Approved Document B. Tested to BS EN 1634.1, BS 476 Part 20 & 22. AUS/NZ: Conforms to BCA Spec. C3.4. Tested to AS 1530.4 & AS/NZS 1905.1. FRL30.

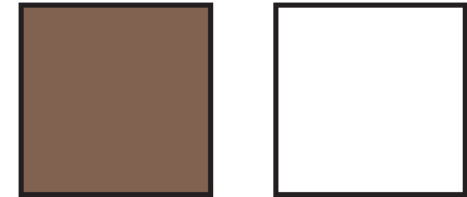

Standard colours are White and Brown, other colours, lengths and finishes available to special order.

RP2004

H

### Approvals

**Fire & Smoke**

AUS/NZ: FRL60, UK/EU: FD60.

