

Motionsense Arbor

Features

Arbor's smooth profile is tailored to perfection. The slight flair of the handle and the curve of the spout make this a transitional look that works with a variety of decorating styles.

• Chrome finish is highly reflective for a mirror–like look that works with any decorating style

• Equipped with the Reflex[™] system for smooth operation, easy movement and secure docking of the pulldown/pullout spray head

- MotionSense[™]delivers exceptional hands-free convenience, allowing a simple hand movement to trigger the flow of water
- Features Duralock™ quick connect system for easy installation
- Pulldown design offers at-your-fingertips water delivery
- One–handle lever handles make it easy to adjust the water
- Aerated stream for everyday cleaning; pause function lets you conveniently stop water flow from the spray head; powerful rinse for heavy-duty cleaning
- Single hole mount creates a cleaner look against custom countertops

AMERICA'S NO.1 FAUCET BRAND

FAUCET DESCRIPTION

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC power adapter Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Quick connect installation Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- Spout uses push-fit hose connections High arc spout provides height and reach to fill or clean large
- ots while pull down wand provides the maneuverability for cleaning or rinsing

OPERATION Lever style handle

- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi CARTRIDGE

____ Duralast™ cartridge for Single-Handle Faucets STANDARDS

> Wave Senso

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🚯 for lever handle



Specifications


MotionSense™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7594E series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED

THRU 1 HOLE , 1-1/2" (38mm) MIN. DIA.



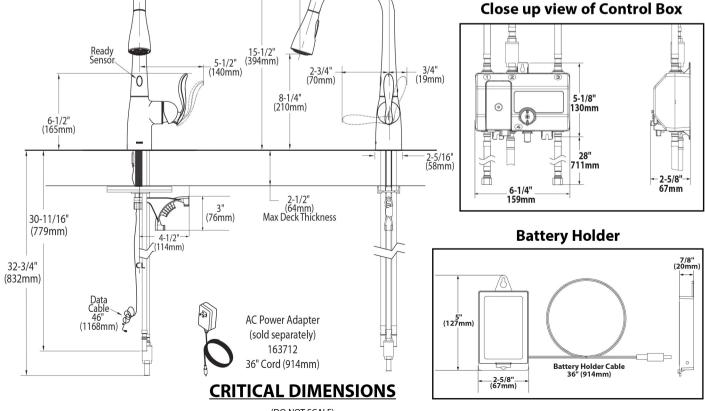

7-7/8" (199mm)

(DO NOT SCALE)

