



AMERICA'S NO.1 FAUCET BRAND

Features

With ultra-modern styling, the 90 Degree collection is a study in minimalism. Geometric forms, squared corners and straight lines create an urban focal point for today's contemporary baths.

- Chrome finish is highly reflective for a mirror-like look that works with any decorating style
- Lever handles make it easy to adjust the water
- Equipped with the Moentrol® pressure-balancing control valve: control allows you to adjust both water volume and temperature; pressure-balancing feature helps maintain temperature even when other water sources in the house are in use
- 6" diameter spray head rainshower for exceptional water coverage
- Full spray
- Advanced, self-pressurizing Moen Immersion™ rainshower technology channels water through the showerhead with three times more spray power than most rainshowers for a more thorough rinse
- 7 1/4" tub spout length
- Built on the Moen M-PACT common valve system, allowing you to update the faucet style in the future without replacing any plumbing
- Complies with Americans with Disabilities Act (ADA) specifications



90 Degree chrome
moentrol® tub/shower

Model No: TS2713

Basic Specifications

- Water usage: 2.5gpm (9.5 L/min) max.
- M-Pact: Yes
- Connection size: 1/2"
- Connection type: IPS
- Valve Type: Moentrol®
- No of ports: Four
- Valve meets ASSE performance requirements



Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- Chrome plated finish
- Includes showerhead, arm, flange and diverter spout

OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^\circ\text{F}$ ($\pm 2^\circ\text{C}$)


FLOW

- Showerhead limited to 2.5 gpm max. (9.5 L/min) at 80 psi

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1, ASSE 1016 and all applicable requirements referenced therein
- **ADA**  lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications

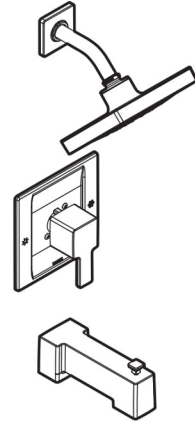

90 DEGREE™ POSI-TEMP® Single-Handle Tub/Shower (Trim Only)

Model: T2711- valve trim only
T2712- shower trim only
T2713- tub/shower trim only

Valves: 62300, 2500 series

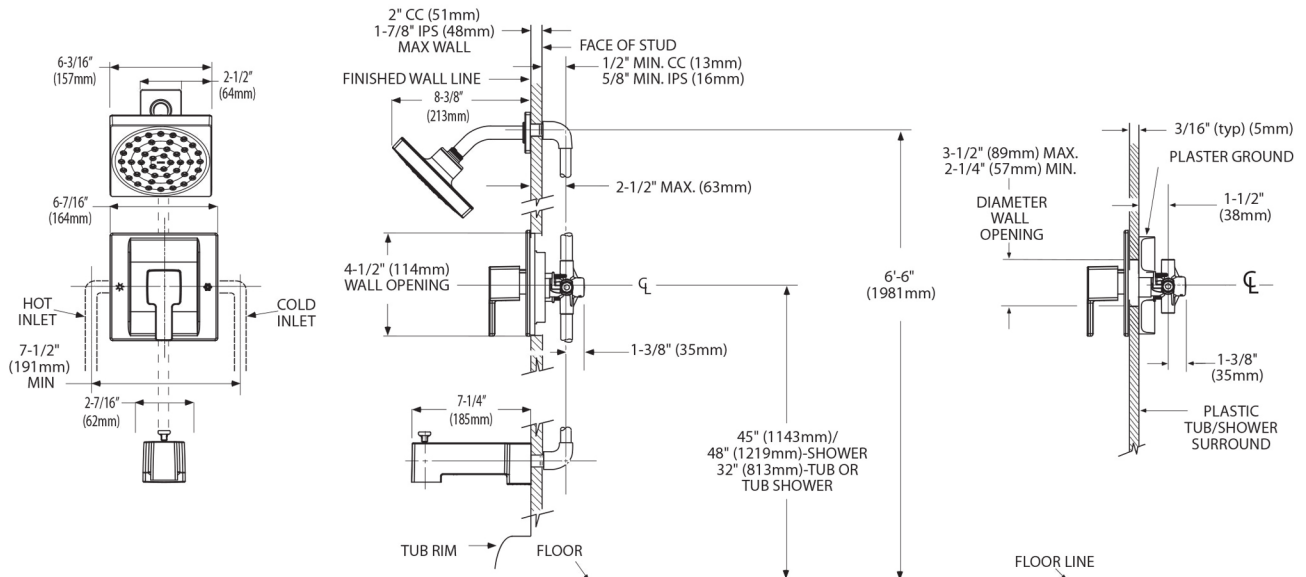

THICK WALL APPLICATION

THIN WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

■ Order by Part Number

- Trim can be used with either the 62300 series or 2500 series valve


Illustrated Parts

90 DEGREE™


Posi-Temp Single-Handle Tub/Shower Trim

Valve Trim		Shower Only		Tub/Shower	
MODEL		MODEL		MODEL	
T2711	Chrome	T2712	Chrome	T2713	Chrome
		T2714	Chrome	T2716	Chrome


Shower Arm Flange
147572 Chrome



Shower Arm
10154 Chrome



Temperature Limit Stop
106479




Stop Tube Kit

96987 Chrome




Showerhead


6340 Chrome
6341 Chrome (models 2714, 2716 only)



Diverter Tub Spout
3896 Chrome




Escutcheon
147574 Chrome




Escutcheon Screws (2)
15528 Chrome



Handle Adapter
116653



Handle Kit
147573 Chrome



M-pact System